



RSC Product Simulation Thermometer Installation Instructions

Revision: A

Date: 11/11/2015


Subject: RSC Product Simulation Thermometer Installation Instructions

Frequency: At Time of Showcase Install



The Thermometer is included with each new RSC Showcase. It is packaged with the fans and the drain hose and will be located on the deck plate of the showcase.

Step 1: Unpack the thermometer and install the battery located in the plastic bag with the mounting clips. **Please note a spare battery is included in the box and should be given to the store manager.**

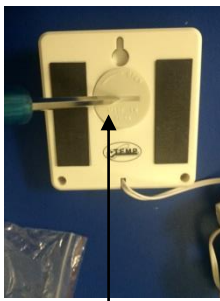


Remove back cover by twisting to unlock



Insert left side of battery below pins




Fully seat battery with right side pins under the battery

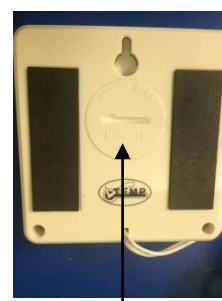

Install cover and twist to lock and the thermometer should come on.

Step 2: Remove the RSC air intake grill and filter plus bottom deck plate.

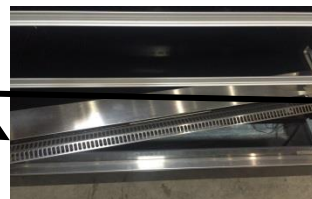


Step 3: Install sensor and run wiring.



Place sensor below the third shelf from the bottom. Sensor will mount on the center left shelf bracket and positioned all the way to the front.



Run wire along the shelf bracket and mount using two of the supplied clips.

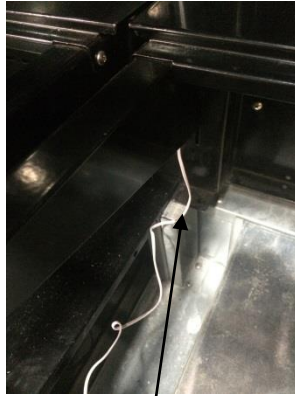


Run wire down the back of the case into the drain pan.



Tie off excess wire using the twist tie supplied.

Step 4: Install thermometer, deck plate and air intake to complete installation.

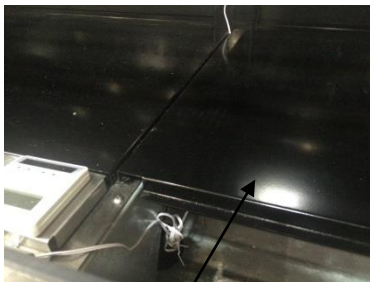

Reinstall the bottom deck plate keeping the wire under the panel.



Run wire through channel and place the thermometer all the way forward by the grill so the solar panel has access to light.



Reinstall the air intake grill and filter.

Note: If joining cases each RSC Showcase will have its own thermometer.

